



TEST REPORT

Applicant : Guangzhou Felicity Solar Technology Co., Ltd.
Address : (Airport Baiyun) No.2, 4, 6, 8, 10 and 12 Donghua Huaye Road, Renhe Town, Baiyun District, Guangzhou, Guangdong, P. R. China
Manufacturer : Guangzhou Felicity Solar Technology Co., Ltd.
Address : (Airport Baiyun) No.2, 4, 6, 8, 10 and 12 Donghua Huaye Road, Renhe Town, Baiyun District, Guangzhou, Guangdong, P. R. China
Product Name : Hybrid Inverter
Trade Mark : 
Make life full of hope
Model No. : IVGM6KLP1G2, IVGM3KLP1G2-24, IVGM3KLP1G2, IVGM3K6LP1G2, IVGM5KLP1G2, IVGM4K6LP1G2
Ratings : Refer to the marking plate
Standard : Safety of power converter for use in photovoltaic power systems
Part 1: General requirements
IEC 62109-1:2010, EN 62109-1:2010
Safety of power converter for use in photovoltaic power systems
Part 2: Particular requirements for inverters
IEC 62109-2:2011, EN 62109-2:2011
Date of Receiver : April 02, 2026
Date of Test : April 03, 2026 to April 20, 2026
Date of Issue : May 16, 2026
Test Report Form No. : NTCS-IEC 62109-1-E
Test Result : Pass*

This Test Report is Issued Under the Authority of :

Compiled by

Zack Zhang

Zack Zhang / Engineer

Approved by



Han Song / Manager

***Remarks:**

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of Shenzhen Nore Testing Center Co., Ltd. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

TEL: +86-755-33525266 Web: www.szntc-c.com

Address: South, No. 1, Building 10, Maqueling Industrial Zone, Nanshan,
Shenzhen, Guangdong, 518057, China

Summary of testing:

The product has been tested according to standard listed below:

- IEC 62109-1:2010
- EN 62109-1:2010
- IEC 62109-2:2011
- EN 62109-2:2011
- Others

General remarks:

"(see Attachment #)" refers to additional information appended to the report.

"(see appended table)" refers to a table appended to the report.

The tests results presented in this report relate only to the object tested.

This report shall not be reproduced except in full without the written approval of the testing laboratory.

List of test equipment must be kept on file and available for review.

Additional test data and/or information provided in the attachments to this report.

Throughout this report a comma / point is used as the decimal separator.

Factory: Guangzhou Felicity Solar Technology Co., Ltd.


Address: (Airport Baiyun) No.2, 4, 6, 8, 10 and 12 Donghua Huaye Road, Renhe Town, Baiyun District, Guangzhou, Guangdong, P. R. China

Test item particulars :	
Equipment mobility..... :	<input type="checkbox"/> movable <input type="checkbox"/> hand-held <input type="checkbox"/> stationary <input checked="" type="checkbox"/> fixed <input type="checkbox"/> transportable <input type="checkbox"/> for building-in
Connection to the mains..... :	<input type="checkbox"/> pluggable equipment <input type="checkbox"/> direct plug-in <input checked="" type="checkbox"/> permanent connection <input type="checkbox"/> for building-in
Environmental category..... :	<input checked="" type="checkbox"/> outdoor <input type="checkbox"/> indoor unconditional <input type="checkbox"/> indoor conditional
Over voltage category Mains..... :	<input type="checkbox"/> OVC I <input type="checkbox"/> OVC II <input checked="" type="checkbox"/> OVC III <input type="checkbox"/> OVC IV
Over voltage category PV..... :	<input type="checkbox"/> OVC I <input checked="" type="checkbox"/> OVC II <input type="checkbox"/> OVC III <input type="checkbox"/> OVC IV
Mains supply tolerance (%)..... :	±10%
Tested for power systems..... :	TN system
IT testing, phase-phase voltage (V)..... :	N/A
Class of equipment..... :	<input checked="" type="checkbox"/> Class I <input type="checkbox"/> Class II <input type="checkbox"/> Class III <input type="checkbox"/> Not classified
Mass of equipment (kg)..... :	Approx. 19.8kg(for all models)
Pollution degree..... :	PD3 for outer of unit, PD2 for inter of unit
Operation ambient temperature..... :	-40°C~+60°C
IP protection class..... :	IP65
Possible test case verdicts:	
- test case does not apply to the test object..... :	N/A (Not Applicable)
- test object does meet the requirement..... :	P (Pass)
- test object does not meet the requirement..... :	F (Fail)


General product information:

1. The product is a Hybrid Inverter, which works with battery to store energy or convert PV/battery energy to the AC load or convert PV/battery energy to the grid.
2. The product shall be used at specified ambient conditions:
 - IP protection class: IP65(test report No.: NTC2601392SV00 issued by Dongguan Nore Testing Center Co., Ltd.)
 - Temperature and humidity: -40°C~+60°C, 0-100%RH, Condensing.
 - Environment pollution degree: PD3 for outer of unit, PD2 for inter of unit.
 - Altitude: up to 2000m.
3. Double/reinforced insulation provided between primary circuits or hazardous voltage to secondary circuits and DVC A circuits by application of safety isolation transformers, optocoupler and sufficient clearances and creepage distances within the unit.
4. Software version: 100; Hardware version: 1.0.
5. All models are the same except for different model number, serial number and ratings. Based on the differences, all tests were conducted on model IVGM6KLP1G2 for full tests. This product series offers both AFCI and non-AFCI options.
6. In order to protect the inverter, user and installer, external circuit breaker shall be equipped for all source ports at the end-use application.
7. When connected to the grid, an isolation transformer must be installed in serial to the AC input.

For topological graph details, see the below figure:
AFC

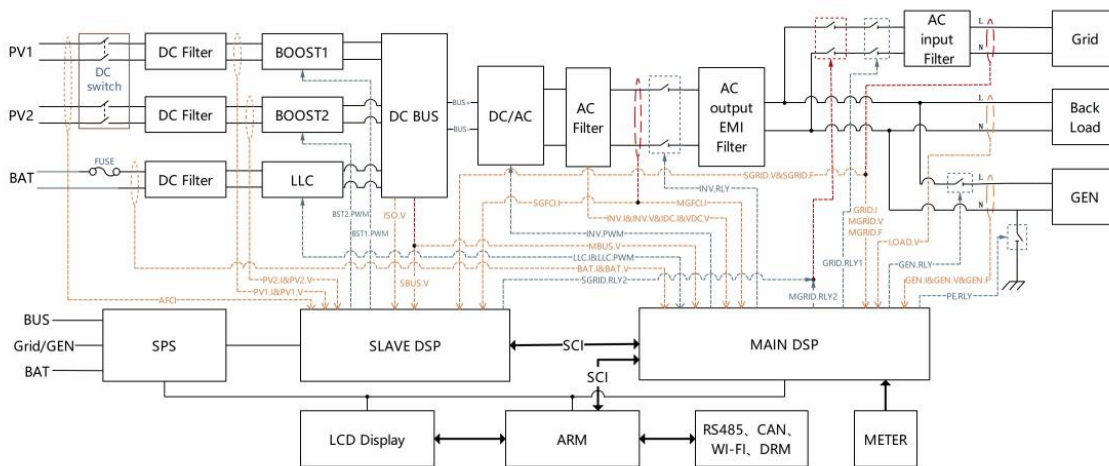

non-AFC

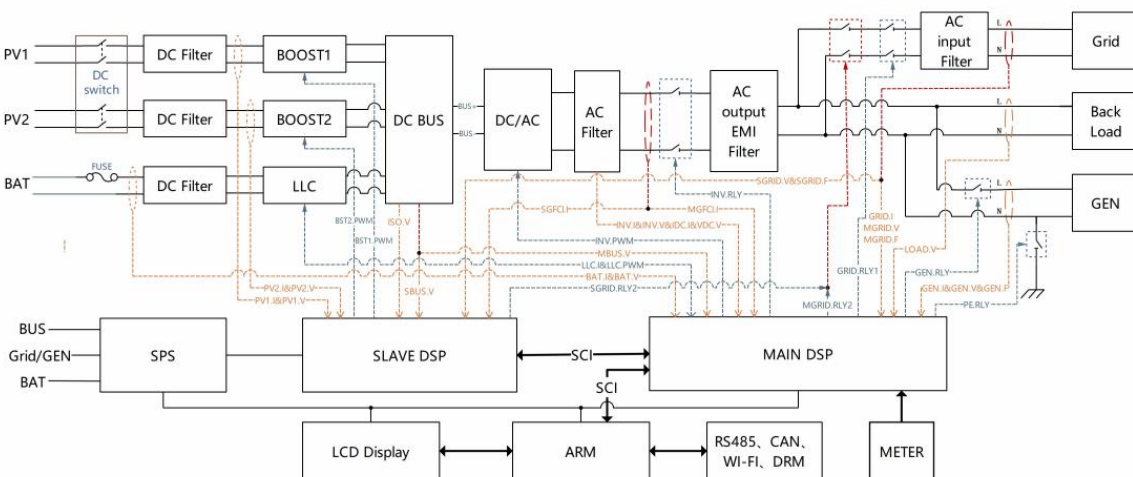

Copy of marking plate:





IVGM6KLP1G2	
Product Type	Hybrid Inverter
Overvoltage-category	DC II; AC III
Ambient Temperature	-25°C~60°C,>45°C Derating
Battery	
Battery Voltage Range	40Vd.c.~60Vd.c.
Max. Charging and Discharging Current	135Ad.c./135Ad.c.
Max. Charging and Discharging Power	6000W
PV	
Max.PV Input Voltage	500Vd.c.
Min.PV Input Voltage	90Vd.c.
MPPT Input Range	150Vd.c.-425Vd.c.
Max. Input Current	18Ad.c./18Ad.c.
Max. Shorted Current	27Ad.c./27Ad.c.
Max. PV Input Power	9600W
On-Grid Mode	
AC Output Voltage	220Va.c./230Va.c.
AC Output Frequency	50/60Hz
AC Output Rated Current	27.3Aa.c./26.1Aa.c.
Max. Continuous AC Passthrough	40Aa.c.
AC Output Rated Active Power	6000W
Max.AC Output Apparent Power	6600VA
AC Output Power Factor	0.8 Leading To 0.8 Lagging
Off-Grid Mode	
AC Output Voltage	220Va.c./230Va.c.
AC Output Frequency	50/60Hz
AC Output Rated Current	27.3Aa.c./26.1Aa.c.
Max. AC Output Current	30Aa.c./28.7Aa.c.
AC Output Rated Active Power	6000W
Max.AC Output Apparent Power	6600VA
Non-isolated topology, IP65, Class I protective class	




CAUTION:

- High Voltage, warning electric shock
- Keep the equipment well ventilated
- The capacitors store hazardous energy. Do not touch while working!

Manufacturer:
Guangzhou Felicity Solar Technology Co., Ltd.
Address:
(Airport Baiyun)No.2, 4, 6, 8, 10 and 12 Donghua Huaye Road,
Renhe Town, Baiyun District, Guangzhou, Guangdong, P. R. China




IVGM5KLP1G2	
Product Type	Hybrid Inverter
Overvoltage-category	DC II; AC III
Ambient Temperature	-25°C~60°C,>45°C Derating
Battery	
Battery Voltage Range	40Vd.c.~60Vd.c.
Max. Charging and Discharging Current	120Ad.c./120Ad.c.
Max. Charging and Discharging Power	5000W
PV	
Max.PV Input Voltage	500Vd.c.
Min.PV Input Voltage	90Vd.c.
MPPT Input Range	150Vd.c.-425Vd.c.
Max. Input Current	18Ad.c./18Ad.c.
Max. Shorted Current	27Ad.c./27Ad.c.
Max. PV Input Power	8000W
On-Grid Mode	
AC Output Voltage	220Va.c. /230Va.c.
AC Output Frequency	50/60Hz
AC Output Rated Current	22.8Aa.c./21.8Aa.c.
Max. Continuous AC Passthrough	35Aa.c.
AC Output Rated Active Power	5000W
Max.AC Output Apparent Power	5500VA
AC Output Power Factor	0.8 Leading To 0.8 Lagging
Off-Grid Mode	
AC Output Voltage	220Va.c. /230Va.c.
AC Output Frequency	50/60Hz
AC Output Rated Current	22.8Aa.c./21.8Aa.c.
Max. AC Output Current	25Aa.c./24Aa.c.
AC Output Rated Active Power	5000W
Max.AC Output Apparent Power	5500VA
Non-isolated topology, IP65, Class I protective class	



CAUTION:

- High Voltage, warning electric shock
- Keep the equipment well ventilated
- The capacitors store hazardous energy. Do not touch while working!

Manufacturer:
Guangzhou Felicity Solar Technology Co., Ltd.
Address:
(Airport Baiyun)No.2, 4, 6, 8, 10 and 12 Donghua Huaye Road,
Renhe Town, Baiyun District, Guangzhou, Guangdong, P. R. China



IVGM4K6LP1G2

Product Type	Hybrid Inverter
Overtoltage-category	DC ; AC
Ambient Temperature	-25°C~60°C,>45°C Derating
Battery	
Battery Voltage Range	40Vd.c.~60Vd.c.
Max. Charging and Discharging Current	115Ad.c./115Ad.c.
Max. Charging and Discharging Power	4600W
PV	
Max.PV Input Voltage	500Vd.c.
Min.PV Input Voltage	90Vd.c.
MPPT Input Range	150Vd.c.~425Vd.c.
Max. Input Current	18Ad.c./18Ad.c.
Max. Shorted Current	27Ad.c./27Ad.c.
Max. PV Input Power	7360W
On-Grid Mode	
AC Output Voltage	220Va.c./230Va.c.
AC Output Frequency	50/60Hz
AC Output Rated Current	20,9Aa.c./20Aa.c.
Max. Continuous AC Passthrough	35Aa.c.
AC Output Rated Active Power	4600W
Max.AC Output Apparent Power	5060VA
AC Output Power Factor	0.8 Leading To 0.8 Lagging
Off-Grid Mode	
AC Output Voltage	220Va.c./230Va.c.
AC Output Frequency	50/60Hz
AC Output Rated Current	20,9Aa.c./20Aa.c.
Max. AC Output Current	23Aa.c./22Aa.c.
AC Output Rated Active Power	4600W
Max.AC Output Apparent Power	5060VA
Non-isolated topology, IP65,Class I protective class	



CAUTION:

- High Voltage,warning electric shock
- Keep the equipment well ventilated
- The capacitors store hazardous energy. Do not touch while working!

Manufacturer:
Guangzhou Felicity Solar Technology Co., Ltd.
Address:
(Airport Baiyun)No.2, 4, 6, 8, 10 and 12 Donghua Huaye Road, Renhe Town, Baiyun District, Guangzhou, Guangdong, P. R. China



IVGM3K6LP1G2


Product Type	Hybrid Inverter
Overtoltage-category	DC ; AC
Ambient Temperature	-25°C~60°C,>45°C Derating
Battery	
Battery Voltage Range	40Vd.c.~60Vd.c.
Max. Charging and Discharging Current	90Ad.c./90Ad.c.
Max. Charging and Discharging Power	3600W
PV	
Max.PV Input Voltage	500Vd.c.
Min.PV Input Voltage	90Vd.c.
MPPT Input Range	150Vd.c.~425Vd.c.
Max. Input Current	18Ad.c./18Ad.c.
Max. Shorted Current	27Ad.c./27Ad.c.
Max. PV Input Power	5760W
On-Grid Mode	
AC Output Voltage	230Va.c.
AC Output Frequency	50/60Hz
AC Output Rated Current	16Aa.c.
Max. Continuous AC Passthrough	35Aa.c.
AC Output Rated Active Power	3680W
Max.AC Output Apparent Power	3680VA
AC Output Power Factor	0.8 Leading To 0.8 Lagging
Off-Grid Mode	
AC Output Voltage	230Va.c.
AC Output Frequency	50/60Hz
AC Output Rated Current	16Aa.c.
Max. AC Output Current	16Aa.c.
AC Output Rated Active Power	3680W
Max.AC Output Apparent Power	3680VA
Non-isolated topology, IP65,Class I protective class	



CAUTION:

- High Voltage,warning electric shock
- Keep the equipment well ventilated
- The capacitors store hazardous energy. Do not touch while working!


Manufacturer:
Guangzhou Felicity Solar Technology Co., Ltd.
Address:
(Airport Baiyun)No.2, 4, 6, 8, 10 and 12 Donghua Huaye Road, Renhe Town, Baiyun District, Guangzhou, Guangdong, P. R. China

IVGM3KLP1G2

Product Type	Hybrid Inverter
Overvoltage-category	DC ; AC
Ambient Temperature	-25°C~60°C, >45°C Derating
Battery	
Battery Voltage Range	40Vd.c.~60Vd.c.
Max. Charging and Discharging Current	70Ad.c./70Ad.c.
Max. Charging and Discharging Power	3000W
PV	
Max.PV Input Voltage	500Vd.c.
Min.PV Input Voltage	90Vd.c.
MPPT Input Range	150Vd.c.-425Vd.c.
Max. Input Current	18Ad.c.
Max. Shorted Current	27Ad.c.
Max. PV Input Power	4800W
On-Grid Mode	
AC Output Voltage	220Va.c./230Va.c.
AC Output Frequency	50/60Hz
AC Output Rated Current	13.7Aa.c./13.1Aa.c.
Max. Continuous AC Passthrough	35Aa.c.
AC Output Rated Active Power	3000W
Max.AC Output Apparent Power	3300VA
AC Output Power Factor	0.8 Leading To 0.8 Lagging
Off-Grid Mode	
AC Output Voltage	220Va.c./230Va.c.
AC Output Frequency	50/60Hz
AC Output Rated Current	13.7Aa.c./13.1Aa.c.
Max. AC Output Current	15Aa.c./14.4Aa.c.
AC Output Rated Active Power	3000W
Max.AC Output Apparent Power	3300VA

Non-isolated topology, IP65, Class I protective class





CAUTION:

- High Voltage, warning electric shock
- Keep the equipment well ventilated
- The capacitors store hazardous energy. Do not touch while working!

Manufacturer:
Guangzhou Felicity Solar Technology Co., Ltd.


Address:
(Airport Baiyun)No.2, 4, 6, 8, 10 and 12 Donghua Huaye Road,
Renhe Town, Baiyun District, Guangzhou, Guangdong, P. R. China

IVGM3KLP1G2-24

Product Type	Hybrid Inverter
Overvoltage-category	DC ; AC
Ambient Temperature	-25°C~60°C, >45°C Derating
Battery	
Battery Voltage Range	20Vd.c.-30Vd.c.
Max. Charging and Discharging Current	140Ad.c./140Ad.c.
Max. Charging and Discharging Power	3000W
PV	
Max.PV Input Voltage	500Vd.c.
Min.PV Input Voltage	90Vd.c.
MPPT Input Range	150Vd.c.-425Vd.c.
Max. Input Current	18Ad.c.
Max. Shorted Current	27Ad.c.
Max. PV Input Power	4800W
On-Grid Mode	
AC Output Voltage	220Va.c./230Va.c.
AC Output Frequency	50/60Hz
AC Output Rated Current	13.7Aa.c./13.1Aa.c.
Max. Continuous AC Passthrough	35Aa.c.
AC Output Rated Active Power	3000W
Max.AC Output Apparent Power	3300VA
AC Output Power Factor	0.8 Leading To 0.8 Lagging
Off-Grid Mode	
AC Output Voltage	220Va.c./230Va.c.
AC Output Frequency	50/60Hz
AC Output Rated Current	13.7Aa.c./13.1Aa.c.
Max. AC Output Current	15Aa.c./14.4Aa.c.
AC Output Rated Active Power	3000W
Max.AC Output Apparent Power	3300VA

Non-isolated topology, IP65, Class I protective class



CAUTION:

- High Voltage, warning electric shock
- Keep the equipment well ventilated
- The capacitors store hazardous energy. Do not touch while working!

Manufacturer:
Guangzhou Felicity Solar Technology Co., Ltd.

Address:
(Airport Baiyun)No.2, 4, 6, 8, 10 and 12 Donghua Huaye Road,
Renhe Town, Baiyun District, Guangzhou, Guangdong, P. R. China

Note:

- The CE marking and WEEE symbol shall be marked on other outer surface of the enclosure and should be at least 5.0mm and 7.0mm respectively in height.
- The above markings are the minimum requirements required by the safety standard. For the final production samples, the additional markings which do not give rise to misunderstanding may be added.
- Marking plates of all models are the same except for different model number, serial number and ratings.
- The manufacturer and importer information should be marked in product when this product import to European Marketing.