

51.2V

Low-voltage LiFePO4 Battery

LPBA Series

Features



Remote Monitoring
via FsolAR APP



Max. 32 Units
in Parallel



Peace of Mind with Fire
Protection Module
(LPBA48200/250WG1)



Wall-mounted / Floor-
mounted Installation



≥ 6000 Cycle Life



7-year Warranty



LPBA 51.2V Series

Model	LPBA48100WG1		LPBA48200WG1	LPBA48250WG1
Battery Type	LiFePO4			
Nominal Energy	5.12kWh		10.24kWh	12.8kWh
Nominal Voltage	51.2V		51.2V	51.2V
Operating Voltage	44.8~57.6V		44.8~57.6V	44.8~57.6V
Max. Continuous Charge/Discharge Current[1]	Charge 100A Discharge 120A		Charge 180A Discharge 180A	Charge 150A Discharge 230A
Peak Charge/Discharge Current	150A @ 15s		250A @ 15s	300A @ 15s
Max. Charge/Discharge Power	Charge 5100W Discharge 6100W		Charge 9200W Discharge 9200W	Charge 7700W Discharge 12kW
Depth of Discharge(DOD)	95%			
Scalability	Up to 32 units in parallel			
Communication	CAN2.0, RS485,WIFI,Bluetooth			
Protection Level	IP21			
Cycle Life	≥6000@ 25°C			
Operating Temperature	Charge 0~55°C Discharge -20~55 °C			
Display	LED			
Installation	Wall-Mounted, Floor-Mounted			
Protection	BMS, Fuse, Breaker, MX+OF			
Warranty[2]	7 Years			
Net Weight	48kg		82KG	86KG
Gross Weight	54kg		103KG	106KG
Product Dimension	565×390×182mm		625X390X259MM	625X390X259MM
Package Dimension	664×494×261mm		744X514X436MM	744X514X436MM

[1] The current is affected by temperature and SOC.

[2] Condition apply, refer to Felicitysolar Warranty Letter.


Product Display



Real-time Monitoring



Max. 32 Pcs in Parallel

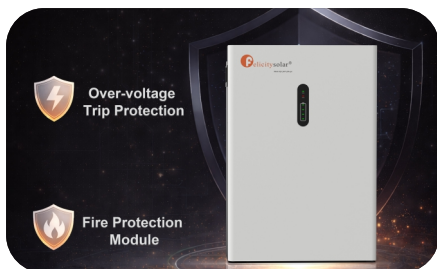

Over-voltage Trip Protection



Longer Lasting LiFePO4 Battery

Guangzhou Felicity Solar Technology Co.,Ltd.



www.felicitysolar.com



sales@felicitysolar.com



No. 2, Donghua Huaye Road, Renhe Town, Baiyun District, Guangzhou, China (Only 10 Mins from Baiyun International Airport)



Official Website



Facebook